


Motor shut-off flap MAK R

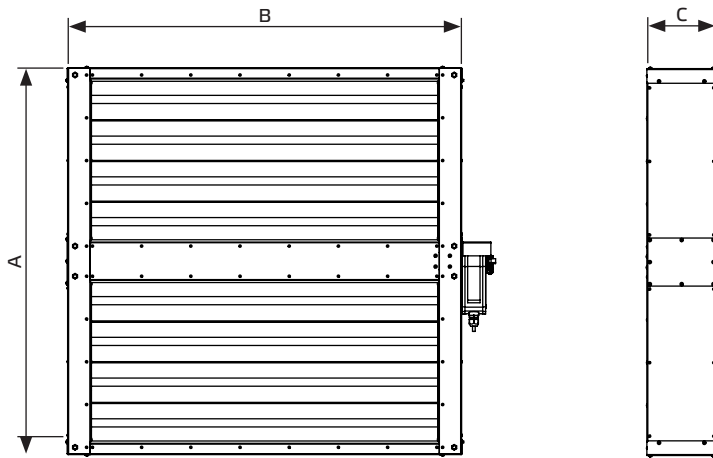

MAK ... V 01
With spring return
(VDI 6022)
MAK ... V 02
With actuator
3-point control

Description:


Motor shut-off flap to avoid cold air entry into the duct system when the unit is switched off. MAK motor shut-off flaps protect building parts as well as heating and cooling coil from frost damages.

- Damper combination outdoor and exhaust air
- With actuator OPEN - CLOSED / spring return AC 230 V, 4 Nm
- For direct mounting on the device
- Housing made of sheet steel, galvanized
- 2 duct connections, flange P 30 (ROTO K 2800/4200)
- Connection cable 1 m length
- Airtight according EN1751 class 2

Type	ID	For models:	A mm	B mm	C mm	Duct connection mm	Weight kg
MAK R 2800 V01	145539	ROTO K 2800 V	683	918	209	850x250	34,0
MAK R 2800 V02	145540	ROTO K 2800 V	683	918	209	850x250	33,6
MAK R 4200 V01	145594	ROTO K 4200 V	883	1168	209	1100x350	46,5
MAK R 4200 V02	145596	ROTO K 4200 V	883	1168	209	1100x350	46,0

Wiring diagram :

MAK ... V 01
With spring return
(VDI 6022)

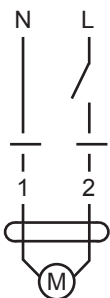

MAK ... V 02
With actuator
3-point control

